



# TECHNICAL DATA

## Tru-Trac Flat Return Tracker HD


### Low Speed Thrust Polyurethane (Fire Retardant) FRAS 12mm

Doc. No: TTMQ724

Page: 1 of 1

Rev: 0

Date: 30.07.2021

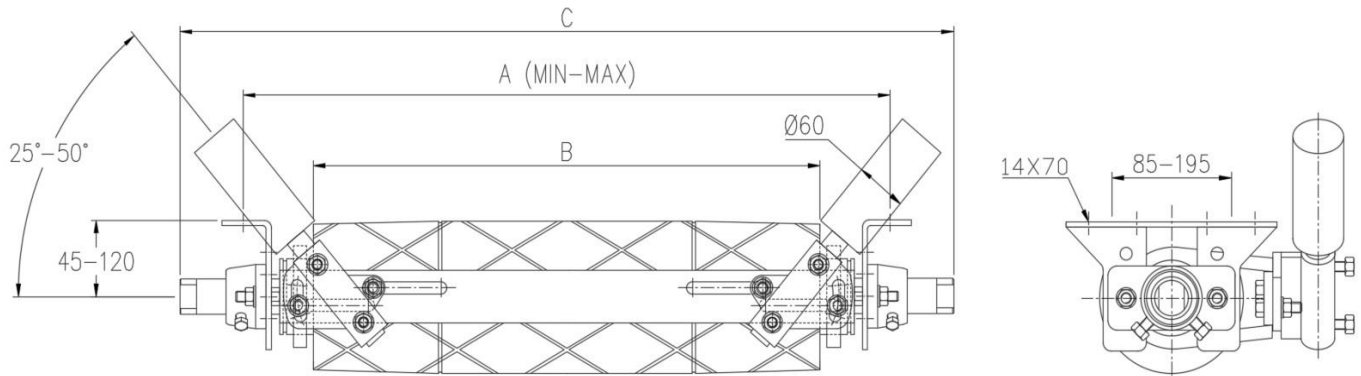

Code	Belt width	A (Mounting Centre)	A Min - Max	B	C	Weight (Kg)
TTFLS105HDTP12F	1050	1296	1196 - 1366	1120	1450	87
TTFLS120HDTP12F	1200	1448	1346 - 1518	1270	1600	90
TTFLS135-140HDTP12F	1350 / 1400	1600 / 1700	1510 - 1720	1450	1850	94
TTFLS150HDTP12F	1500	1752	1672 - 1822	1590	1950	96

**Outside Drum Dia= 170\***  
**Shaft = 40 Dia**

All dimensions in mm

**Non standard trackers can be made to customer specifications**

\* 170 dia, represents the minimum diameter, the actual dia can vary between 170 to 174

**TRU-TRAC ROLLERS (PTY) LTD**

Tel: +27 (12) 661-9531 Fax: +27 (12) 661-9489 Web Page: <http://www.tru-trac.com>

Email: [info@tru-trac.com](mailto:info@tru-trac.com) PO Box 8707 Centurion 0046